




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61M 16/04	A2	(11) International Publication Number: WO 00/20062 (43) International Publication Date: 13 April 2000 (13.04.00)
(21) International Application Number: PCT/GB99/03309 (22) International Filing Date: 6 October 1999 (06.10.99) (30) Priority Data: 9821771.4 6 October 1998 (06.10.98) GB (71)(72) Applicant and Inventor: BRAIN, Archibald, Ian, Jeremy [GB/GB]; Sandford House, Fan Court Gardens, Longcross Road, Longcross, Chertsey, Surrey KT16 0DJ (GB). (74) Agents: WEST, Alan, H. et al.; R G C Jenkins & Co., 26 Caxton Street, London SW1H 10RJ (GB).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: LARYNGEAL MASK AIRWAY DEVICE**(57) Abstract**

A modified laryngeal mask airway device (LMA-device) (20) is provided with means to improve ease of insertion, reliability of function and higher seal pressure (i.e., cuff pressure ratio). The LMA-device (20) includes an indented section (140) of the airway tube (47) to offer locating means and purchase for the inserting finger, and extended mask aperture bars (115, 117) to increase the effective ventilating area of the mask (20) and reduce the possibility of epiglottis displacement occasioned by mask insertion. The LMA-device (20) further includes a modification of the airway tube angle (137) of attachment to the mask (20), and provision of a posterior or back-cushion (77) covering the entire posterior surface of the mask (20),

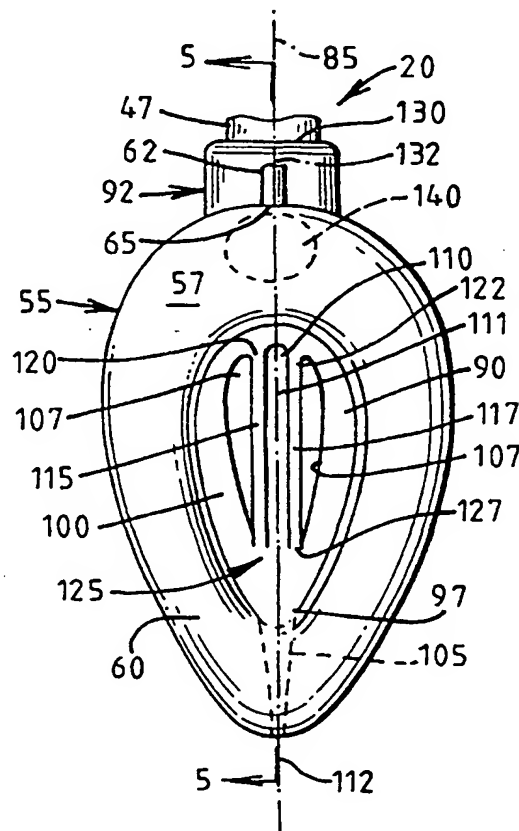

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

LARYNGEAL MASK AIRWAY DEVICE

This invention relates to laryngeal mask airway devices (LMA-devices) which are artificial airway devices permitting spontaneous or artificial ventilation of the lungs of a patient.

5 LMA-devices are described in UK Patents Nos. 2,111,394 and 2,205,499. Such devices have become accepted items of equipment for rapidly and reliably establishing an unobstructed airway in a patient in emergency situations and in the administration of anaesthetic gases, and have found use in most countries of the world.

10 The insertion of such a LMA-device into the throat of the patient is, in the great majority of cases an entirely straightforward procedure which can be carried out successfully following readily understandable training. Fig. 1 illustrates a preferable situation for the insertion of an LMA-device into a patient's throat. The inflatable cuff surrounding the bowl of the mask is fully
15 deflated and correctly oriented and aligned for passage through the back of the mouth and into the throat. The semi-rigid bowl of the mask is supported by the anesthetist's hand grasping the flexible airway tube adjacent its junction with the mask in order to gently urge the mask into the patient's throat.

Circumstances do, however, occasionally arise during insertion
20 leading to undesirable positioning of the device and/or undesirable forces being applied to the device and/or to the patient. One of the most common of such circumstances is that the leading end of the device, *i.e.*, the distal end of the fully deflated inflatable cuff formation, becomes folded over on itself presenting the more rigid distal end of the mask to catch the inside the throat
25 and subject the patient to undesirable forces. Alternatively, or additionally, the folded over distal end of the cuff will obstruct correct and full inflation of the cuff thereby obstructing the creation of a full seal around the patient's laryngeal inlet and hence obstructing formation of a full enclosed airway to the patient's lungs. This, in turn, may result in anesthetic gases passing
30 unnecessarily into the patient's oesophagus and in any matter regurgitated

through the oesophagus entering the larynx and soiling the patient's trachea and lungs.

The present invention seeks to eliminate the disadvantages associated with such undesirable insertion by minimizing the risk of the deflated cuff formation becoming folding over on itself during the insertion procedure.
5 This is achieved by incorporating into the cuff at its distal end a reinforcing rib which serves to stiffen the leading end of the LMA-device during the course of the procedure for its insertion.

In accordance with the invention, there is provided a laryngeal mask
10 airway device comprising a flexible airway tube and a mask attached to one end of the airway tube, the mask having a generally elliptical periphery provided with an inflatable cuff which surrounds the hollow interior of the mask into which the airway tube opens, the device including a reinforcing rib incorporated into the distal end of the inflatable cuff.

15 In a preferred aspect, the mask structure or backplate which is of a more rigid material than that of the soft and inflatable cuff formation has its back extended to the distal end of the cuff, in order to form the reinforcing rib.

The LMA-device of the invention incorporating such a reinforcing rib has a number of advantages over and above that for which it was specifically
20 devised. Thus, not only does the reinforcing rib largely eliminate the likelihood of the distal end of the deflated cuff formation folding over on itself during insertion of the LMA-device into the patient's throat, but also the cuff is easier to deflate preferably since the reinforcing rib will urge the deflating cuff into the desired orientation. Since the cuff in its deflated state
25 may adopt an upturned or down turned orientation, the reinforcing rib will urge the deflated cuff into the down turned position desirable for insertion into the patient. Further, in addition to the rib being stiffer than the deflated cuff, it will preferably also be more compliant than the material of the bowl of the

mask and the stiffness gradient formed by the rib and the mask will assist in the insertion of the device and substantially reduce the likelihood of any hard or angular edges of the bowl of the mask being presented which may subject the patient's throat to undesirable forces. Additionally, the rib will
5 substantially reduce the promontory previously formed by the distal end of the mask structure, rendering the LMA-device substantially self-inserting when it is properly deflated.

As shown in Fig. 1, insertion of the LMA-device requires use of the index finger to ensure correct placement of the LMA-device in the base of the
10 throat. However, the index finger may slip from its intended position on the airway tube at the proximal end of the inflatable cuff, due to the presence of slippery secretions in the patient's mouth and/or the application of lubricant to assist smooth passage of the LMA-device.

In accordance with a preferred aspect of the invention, an indentation
15 is provided on the airway tube or backplate at the intended location of finger contact to assist in locating and stabilizing the finger and to reduce the possibility of finger slippage. The indentation is situated on the surface of the airway tube adjacent its junction with the tube-joint, or on the tube-joint itself, and beneath the cuff formation surrounding the backplate. The airway
20 tube usually has a thicker wall at this point, *i.e.*, near the distal end of the airway tube, to form a smooth joint with the tube-joint, and the extra thickness enables the indentation to be accommodated without weakening the airway tube at this location. The tube-joint may also have a thicker wall at this point. Indeed, the indentation serves the additional useful purpose of improving the
25 flexibility of the airway tube or tube-joint at this point. The indentation serves not only to prevent sideways slippage of the finger from the airway tube or tube-joint, but also to minimize the possibility of forward slippage and undesirable contact between the finger and the inflatable cuff, for example by

the fingernail.

An additional difficulty which may occur during attempts to insert the LMA-device is that the patient's epiglottis (which protects the entrance to the glottis or larynx) may be pushed downwards or anteriorly as the LMA-device is inserted fully into the throat. Indeed, this occurs in about 40% of cases and can sometimes obstruct breathing. A conventional LMA-device has the interior of the mask which in use surrounds the glottis, communicating with the interior of the airway tube through an aperture which is traversed by two bars, known as mask aperture bars (MABs). The MABs function as a ramp up which the epiglottis slides as the mask is inserted and are intended to hold the epiglottis away from the mask floor when the LMA-device is in its correct operating location. Additionally, the MABs serve to prevent the epiglottis from obstructing the narrow entrance of the airway tube. Generally, the MABs successfully perform this function but occasionally obstruction may occur if the epiglottis is down folded, *e.g.*, anteriorly, or if the mask is not sufficiently advanced into place.

In accordance with a preferred aspect of the invention, the aperture by which the interior of the airway tube opens into the mask is elongated and the MABs are extended to traverse the length of that aperture. By elongating the aperture to half the bowl of the mask, the range of positions of the LMA-device compatible with a clear airway is greatly increased and the angle of ramp up which the epiglottis must slide is reduced, both of which make the epiglottis less likely to be down-folded during insertion of the LMA-device.

In the drawings:

Fig. 1 is a perspective view of the laryngeal-mask airway device of the present invention being inserted into the throat of a patient;

Fig. 2 is a side view of the device of Fig. 1 inserted into sealed engagement with the tissue surrounding the laryngeal inlet of the patient;

Fig. 3 is a posterior perspective view of the device of Fig. 1 removed from the patient, the proximal portions of the airway and inflation tubes being broken away, the back-cushion being cut-away;

Fig. 4 is an anterior plan view of the device of Fig. 1 removed from the patient, the proximal portions of the airway and inflation tubes being broken away, the indentation on the backplate being shown as hidden;

Fig. 5 is a cross-sectional view of the device in the plane indicated by line 5-5 of Fig. 4, the proximal portions of the airway and inflation tubes being broken away;

Fig. 6 is an anterior plan view of the backplate removed from the device shown in Fig. 5;

Fig. 7 is a schematic view of the device in the plane of Fig. 5 showing the present invention, in solid lines, and an airway tube and adjoining portion of the backplate of a prior laryngeal-mask airway device, in broken lines, the proximal portions of the airway and inflation tubes being broken away;

Fig. 8 is a cross-sectional view of the device in the plane of Fig. 5 showing one of the mask aperture bars of the present invention, in solid lines, and one of the mask aperture bars of a prior laryngeal-mask airway device, in broken lines, the proximal portions of the airway and inflation tubes being broken away;

Fig. 9 is a lateral view of the backplate removed from the device shown in Fig. 5;

Fig. 10 is a cross-sectional view of a second embodiment of the device of Fig. 1 removed from the patient, the device being shown in the plane of Fig. 5, the proximal portions of the airway and inflation tubes being broken away; and

Fig. 11 is an anterior plan view of the backplate removed from the device shown in Fig. 10.

Corresponding reference characters indicate corresponding parts throughout the several views of the drawings.

As used herein, the anatomical terms "anterior" and "posterior", with respect to the human body, refer to locations nearer to the front of and to the back of the body, respectively, relative to other locations. The term "anterior-posterior (A-P)" refers to a direction, orientation or the like pointing either anteriorly or posteriorly. The anatomical terms "proximal" and "distal", with respect to applying an instrument to the human body, refer to locations nearer to the operator and to the inside of the body, respectively. Alternatively, "distal", as opposed to "proximal", means further away from a given point; in this case, "distal" is used to refer to positions on the LMA-device 20 or in the body relative to the extreme outer or connector end of the LMA-device. "Proximal" is the opposite of "distal". The term "lateral" refers to a location to the right or left sides of the body, relative to other locations. Alternatively, "lateral" means to one or other side of the mid-line, with respect to the major axis of the body, or to a device lying in the body's major axis. The term "bilateral" refers to locations both to the left and right of the body, relative to the sagittal plane. The term "sagittal" or "sagittally" refers to a vertical longitudinal plane through the center or midline of the body that divides a bilaterally symmetrical body into right and left halves. The sagittal plane is the plane passing antero-posteriorly through the middle of the body in its major axis. The term "medial" means nearer to the mid-line.

A laryngeal-mask airway device (LMA-device) of the present invention, is designated generally by the reference numeral 20 in Figs. 1 and 2. The LMA-device 20, in a deflated condition, is inserted into the throat 22 the upper surface of which is bounded by hard and soft palates 25, 27. The LMA-device 20 is lodged in the pharynx 30 of the throat 22 at the base of the hypo-pharynx 32 where the throat divides into the trachea 35 (*i.e.*, windpipe)

and oesophagus 37. A lower portion of the LMA-device 20 reaches to the base of the hypo-pharynx 32. After the LMA-device 20 is so lodged in the pharynx 30 such that the lower portion of the LMA-device reaches the base of the hypo-pharynx 32, the LMA-device is inflated. Disposed in the junction
5 between the throat 22 and trachea 35 is the flexible epiglottis 40 (*i.e.*, a lid-shaped structure) which forms the upper border of the larynx, entry through which is provided by the laryngeal inlet 45.

Referring to Figs. 1 and 2, and more particularly to Fig. 3, the laryngeal-mask airway device (LMA-device) 20 is shown comprising an
10 airway tube 47, installed through the mouth 50 of a patient. The LMA-device 20 further comprises a backplate 52 having an airway port 55 through which the airway tube 47 can establish a free externally accessible ventilation passage, *via* the patient's mouth 50 and throat 22, and past the epiglottis 40 to the larynx. The backplate 52 is preferably of an elastomer such as silicone
15 rubber and relatively stiff, for example, of 80 Shore durometer.

As further shown in Figs. 3 and 4, the backplate 52 is surrounded by a main-cuff 55 comprising an inflatable ring which, when inflated, has the shape of a torus generated by an asymmetrical oval or ellipse having a wider proximal region 57 and narrower distal region 60. The main-cuff 55 is
20 circumferentially united to the backplate 52 in essentially a single plane.

An externally accessible cuff-tube 62 and cuff-port 65 on the main-cuff 55 are the means of supplying air to the main-cuff and of extracting air from (and therefore collapsing) the main-cuff for purposes of insertion in or removal from the patient. The check-valve 67 is disposed in the cuff-tube 62
25 for holding a given inflation or holding a given deflation of the main-cuff 55.

In the installed position of Figs. 1 and 2, the projecting but blunted distal region 60 of the main-cuff 55 is shaped to conform with the base of the hypo-pharynx 32 where it has established limited entry into the upper

sphincteral region of the oesophagus 37. The pharyngeal-side 70 of the backplate 52 is covered by a thin flexible panel 72, as shown in Figs. 3 and 5, which is peripherally bonded to a margin 75 on the posterior surface of the main-cuff 55, to define an inflatable back-cushion 77 which assures
5 referencing to the posterior wall of the pharynx 30 and thus is able to load the inflated main-cuff 55 forward for enhanced effectiveness of sealing engagement to the tissues surrounding the laryngeal inlet 45. The inflated main-cuff 55, thus-engaged to the laryngeal inlet 45, orients a portion of the airway tube 47 including the distal-end 80 at an acute angle to a mid-line
10 major plane 82 of the main-cuff 55 and in substantial alignment with the axis of the laryngeal inlet 45, for direct airway communication only with the larynx.

The major plane 82 is a plane containing the major axis 85 of the main-cuff 55 extending between proximal and distal regions 57, 60. The
15 major plane 82 is disposed between, and parallel to, the anterior and posterior surfaces of the main-cuff 55. Additionally, the major plane 82 is equidistant from the anterior and posterior surfaces of the main-cuff 55.

More specifically, and with particular reference to Fig. 5, the toroidal-shaped main-cuff 55 is formed by first moulding it in an intermediate stage
20 having opposing edges, each of which has an elliptical shape. The opposing edges of the main-cuff 55, when in generally edge-to-edge relation, are welded together to form an internal seam 87, as shown in Fig. 5. The seam 87 defines an oval contained in a plane which is parallel to the major plane 82, corresponding to the internal surface of the main-cuff 55.

25 As used herein, the term "welding" describes the bonding together of two components having the same or similar chemical compositions, either by adhesive having the same or similar chemical composition as the components, or by high pressure or temperature fusion, or a combination of any of them.

The back-cushion 77, or auxiliary rear cushion, overlies the posterior surface of the backplate 52, as shown in Fig. 3 and 5. Construction of the back-cushion 77 is described in U.S. Patent 5,355,879, the contents of which are hereby incorporated by reference herein.

5 Inflation-air supply to the back-cushion 77 may be *via* one or more ports in the main-cuff 55 which provide communication between the interiors of the main-cuff and back-cushion so that both are inflated and deflated together. Alternatively, inflation-air supply to the back-cushion 77 may be *via* a separate inflating means, such as an inflation tube (not shown), similar to
10 cuff-tube 62, may be provided for the back-cushion so that the back-cushion 77 and main-cuff 55 are separately and independently inflatable and deflatable.

 If the main-cuff 55 and back-cushion 77 are inflated and deflated together, communication between the main-cuff and back-cushion may be
15 facilitated by a separate tube (not shown), preferably with multiple perforations along its length, contained within the main-cuff in communication with the cuff-port 65 such that each perforation communicates with a port between the interiors of the main-cuff and back-cushion 77. Such a separate tube preserves a flowpath between the cuff-port 65 and back-
20 cushion 77 if the main-cuff 55 is completely collapsed from deflation, thereby providing for further deflation of the back-cushion 77 *via* the cuff-port 65. Alternatively, a channel (not shown) may be formed on the inner surface of the main-cuff 55 between the opening of the cuff-tube 62 into the main-cuff and at least one of the one or more ports between the interiors of the main-cuff
25 and back-cushion 77. Such a channel preserves a flowpath between the cuff-tube 62 and back-cushion 77 if the main-cuff 55 is completely collapsed from deflation.

 The backplate 52 has a one-piece, integral spoon-shape including a

bowl 90 and an external tube-joint 92 oriented proximally relative to the bowl, as shown in Figs. 5 and 6. Opposite proximal sides of the bowl 90 are defined by a convex pharyngeal-side 95 and concave laryngeal-side 97. The bowl 90 is relatively shallow in the anterior-posterior direction. The bowl 90 also has
5 an elongate integral reinforcing distal rib 105.

The proximal portion of the bowl 90 sandwiched between the pharyngeal- and laryngeal-sides 95, 97 abuts the posterior surface of the seam 87, as shown in Fig. 5, to attach the backplate 52 to the main-cuff 55. More specifically, the periphery of the proximal portion of the bowl 90 sandwiched
10 between the pharyngeal- and laryngeal-sides 95, 97 is hermetically bonded to the inner periphery of the main-cuff 55 to establish separation between the laryngeal-chamber region 100 and pharyngeal region 102. The seam 87 may also be inserted into a corresponding groove in the bowl 90. Alternatively, the backplate 52 and main-cuff 55 may be extruded as a single, unitary piece.
15 The periphery of the bowl 90 which abuts the inner periphery of the main-cuff 55 defines a bowl plane 106 which is parallel to the major plane 82 of the main-cuff 55.

When the backplate 52 is attached to the main-cuff 55, the distal rib 105 pierces the proximal surface of the distal region 60. The edges of the
20 main-cuff 55 in the distal region 60 surrounding the distal rib 105 are hermetically sealed to it such that the enclosure of the main-cuff is defined in part by the distal rib. The distal rib 105 extends through the interior of the main-cuff 55 to the distal surface of the distal region 60.

The bowl 90 has a longitudinally elongated airway aperture 107 into
25 which opens a backplate passage 110 extending through the tube-joint 92. The airway aperture 107 has a major axis 111 which is contained in the sagittal plane 112.

Two mask aperture bars (MABs) 115, 117 extend longitudinally and

anteriorly of the airway aperture 107, as shown in Fig. 4. The MABs 115, 117 are disposed on opposite sides of the sagittal plane 112 and symmetrical relative to the plane. The MABs 115, 117 each have a proximal end 120, 122 abutting the laryngeal-side 97 of the bowl 90 proximally of the airway aperture 107. Additionally, the MABs 115, 117 each have a distal end 125, 127, abutting the laryngeal-side 97 of the bowl 90 distally of the airway aperture.

The MABs 115, 117 may be defined by a portion of a continuous layer of elastomer, integral with the main-cuff 55, which overlies the laryngeal-side 97. The elastomer layer has an opening the periphery of which is outward of the airway aperture 107. The opening is longitudinally traversed by the MABs 115, 117.

The distal ends 125, 127 of the MABs 115, 117 are joined to the bowl 90 generally near the longitudinal mid-point of the laryngeal-side 97, or distally of it. This results in each MAB 115, 117 forming an angle 118 with the bowl plane 106 which is less than the corresponding angle between the MAB P1 of a prior LMA-device, as shown in Fig. 8. The relatively shallowness of the bowl 90 in the anterior-posterior direction further results in the angle 118 being more acute. A preferred angular displacement of the angle 118 is between 7 and 12 degrees, and may preferably be 9 degrees.

The elongate tube-joint 92 is formed on the pharyngeal-side 95 and extends posteriorly and proximally relative to the bowl 90. The tube-joint 92 has a proximal end 130 from which the backplate passage 110 extends to the airway aperture 107 in the laryngeal-side 97. The backplate passage 110 has a longitudinal central axis 132 contained in the sagittal plane 112. At the proximal end 130, the backplate passage 110 has an elliptical cross section with a major axis 135 oriented in perpendicular relation to the sagittal plane 112. The major axis 135 is therefore transverse to the major axis 111 of the

airway aperture 107. This differing orientation of the major axes 111, 132 of the backplate passage 110 is accomplished by a smooth transition in the cross-sectional shape of the backplate passage along its length.

5 The tube-joint 92, and the central axis 132 of the backplate passage 110 are inclined posteriorly in the sagittal plane 112 relative to a plane containing the periphery of the bowl 90. In the embodiment shown in Fig. 5, the inclination of the tube-joint 92 may be defined by a tube-joint axis 136 which is perpendicular to the cross-section of the proximal end 130 and which coincides with the central axis 132 at its intersection with the cross-section of
10 the proximal end 130. The inclination of the tube-joint 92 may be further defined by an angle 137 between the tube-joint axis 136 and bowl plane 106. A preferred angular displacement of the angle 137 is between 5 and 10 degrees, and may preferably be 7 degrees. The inclination of the tube-joint 92, defined by the angle 137, is less than the corresponding angle defined by
15 the inclination of a tube-joint P2 of a prior-LMA, as shown in Fig. 7.

The anterior surface of the tube-joint 92 has an indentation 140, as shown in Figs. 4, 5, 6 and 9. As shown in Fig. 5, the indentation 140 is in the thick wall region of the tube-joint 92 resulting in the advantage of increasing the flexibility of the tube-joint. The indentation 140 may be occupied by the
20 main-cuff 55 when the main-cuff is inflated, as shown in Fig. 5. The indentation 140 may also be formed closer to the proximal end 130, such as is shown in Fig. 1. Alternatively, the proximal portion of the indentation 140 may be formed across the boundary between the tube-joint 92 and airway tube 47 such that portions of the indentation are in both the airway tube and tube-
25 joint. Also, the entire indentation 140 may be formed in the airway tube 47 adjacent to its connection to the tube-joint 92.

The backplate 52, main-cuff 55 and back-cushion 77 of LMA-devices
20 are generally manufactured by molding techniques from suitably soft and

compliant rubber materials. The backplate 52 and inflatable main-cuff 55 may be formed as a one piece molding by molds and molding techniques such as are described, for example, in U.S. Patent 5,305,743, the contents of which are hereby incorporated herein. The backplate 52 is formed to have a greater
5 thickness than the walls of the main-cuff 55 to provide the LMA-device 20 with a degree of rigidity while still allowing it to have an overall soft and flexible nature. The main-cuff 55 has a thin-walled construction and the reinforcing distal rib 105 has an intermediate thickness and compliancy.

As shown in Figs. 4 and 5, the portion of the airway tube 47
10 containing the distal end 80 is supported in the backplate passage 110 of the tube-joint 92 in communication with the airway aperture 107 in the laryngeal-side 97. Such communication provides a flowpath between the airway tube 47 and laryngeal-chamber region 100. The airway tube 47 is connected to the tube-joint 92 by welding using an adhesive or, alternatively, connected by
15 high-pressure or temperature fusion.

Fig. 10 shows a second embodiment of the backplate 52a. Parts in Fig. 10 having corresponding parts in Figs. 5 and 6 have the same reference numeral with the addition of suffix a. The backplate 52a is similar to the backplate 52 illustrated in Figs. 5 and 6 except that the distal rib 105a of the
20 backplate 52a is applied to the posterior surface of the distal region 60a of the main-cuff 55a, as shown in Fig. 10. The distal rib 105a has a concave anterior surface corresponding to the adjoining convex posterior surface of the distal region 60a thereby limiting the radial clearance between the distal region and end 60a, 105a. The distal rib 105a does not pierce the posterior surface of the
25 distal region 60a, in contrast to the embodiment shown in Fig. 5, and is therefore separated from the interior of the main-cuff 55a. The distal rib 105a may be effectively constituted by a thickening of the posterior wall of the distal region 60a of the inflatable main-cuff 55a and, as shown, forms a distal

extension of the bowl 90a of the backplate 52a. The distal rib 105a has a downturned profile by being incorporated into the posterior surface of the main-cuff 55a. The distal end of the distal rib 105a is spatulate.

5 Insertion of the LMA-device 20 into the patient's throat 22 is illustrated in Fig. 1, and is done preferably with the patient in a supine orientation and the head 142 of the patient tilted backwards and supported from below by the left hand 145 of the anaesthetist. The right index finger 147 and thumb 150 of the anaesthetist gently grasps the flexible airway tube 47 of the LMA-device 20. The right index finger 147 is located at the junction of
10 the airway tube 47 and the main-cuff 55 to gently urge the LMA-device 29 with its down-turned deflated main-cuff into the patient's throat 22. As shown in Fig. 1, the indentation 140 provides a locator for the right index finger 147 of the anaesthetist during insertion of the LMA-device 20 into the throat 22 of the patient. When the LMA-device 20 is properly positioned across the
15 patient's laryngeal inlet 45, the main-cuff 55 is gently inflated through cuff tube 62 to form an airway seal around the laryngeal inlet and establish a closed airway to the patient's lungs. The LMA-device 20 so positioned, with the main-cuff 55 fully inflated, is shown in Fig. 2. The thin-walled construction of the main-cuff 55 enables it, when inflated, to present to the
20 tissues surrounding the laryngeal inlet 45 a softly compliant sealing surface.

As shown in Fig. 1, the distal region 60 of the fully deflated main-cuff 55 is the leading end of the LMA-device 20 when inserting the LMA-device into the patient's throat 22. Careful insertion of the LMA-device 20 into the patient's throat 22 is required to prevent the distal region 60 from folding over
25 onto itself because the distal region is formed of a soft and flexible material which facilitates such folding over. Such folding over is obstructed by the reinforcing distal rib 105 within the distal region 60 of the inflatable main-cuff 55. The intermediate thickness and compliancy of the reinforcing distal

rib 105 allows it to follow the contours of the posterior surface of the inflated main-cuff 55, thereby to urge the deflated main-cuff into the desired downturned orientation and to enable the LMA-device 20 present a distal end to the tissues of the throat 22 which is sufficiently pliable to avoid undesirable contact with the throat during its insertion but sufficiently rigid to prevent it from being readily folded over on itself during such a procedure. As shown in Figs. 3 and 4, the distal rib 105 is not readily visible when the main-cuff 55 is either deflated or inflated since it is contained within the distal region 60.

In the embodiment shown in Fig. 10, the downturned profile the distal rib 105a helps to facilitate adoption by the main-cuff 55a of the desired downturned orientation when it is fully deflated. The distal rib 105a may not be readily visible because it may appear to blend in with the posterior wall of the distal region 60. The spatulate of the distal portion of the distal rib 105a does not present any sharp edges or corners to the throat 22 the patient during insertion of the LMA-device 20 which is desirable as striking of the throat 22 by sharp edges or corners is normally to be avoided.

The acute angle 118 between the MABs 115, 117 and the bowl plane 106 results in the MABs presenting a substantially less gradient to the patient's epiglottis 40 than the MABs P1 of a prior-LMA, as shown in Fig. 8. The MABs 115, 117 provide a ramp up which the epiglottis 40 slides when the backplate 52 and the attached main-cuff 55 enter the pharynx 30. If the MABs are sufficiently posterior of the epiglottis 40, *e.g.*, MAB P1, such sliding contact may result in the proximal end of the epiglottis 40 folding over posteriorly such that it becomes sandwiched between the base of the epiglottis and the MABs possibly obstructing the airway aperture 107. The likelihood of such posterior folding over of the epiglottis 40 is substantially reduced by the MABs 115, 117 because the A-P clearance between the MABs 115, 117 and laryngeal-side 97 is increased thereby anteriorly propping the epiglottis to

limit further anterior displacement necessary to accommodate the posterior folding. Further reduction in the likelihood of an obstruction is provided by the increased A-P clearance between the MABs 115, 117 and laryngeal-side 97, which in turn provides increased A-P clearance between the epiglottis 40 and airway aperture 107 contained in the laryngeal-side.

When the main-cuff 55 and backplate 52 are installed in the pharynx 30 such that main-cuff is sealed against the tissues surrounding the patient's laryngeal inlet 45, the reduced angle 137 between the tube-joint axis 136 and bowl plane 106, relative to the corresponding force resulting from tube-joint P2, reduces the force exerted by the tube-joint 92 and airway tube 47 against the posterior surface of the throat 22. Any force against the tissues of the throat 22 should normally be limited.

The reduction in the force exerted by the tube-joint 92 and airway tube 47 against the posterior surface of the throat 22 may result in a reduction in the reaction force of the main-cuff 55 against the tissues surrounding the patient's laryngeal inlet 45 which, in turn, may reduce the tightness of the seal between the main-cuff and tissues. Any such reduction in the seal is compensated for the inflatable back-cushion 77 which gently urges the backplate 52 and main-cuff 55 anteriorly against the tissues surrounding the patient's laryngeal inlet 45 in order to reinforce the seal between the inflated main-cuff and the tissues.

Additionally, the inflatable back-cushion 77 presents a more softly complaint-surface to the posterior surface of the patient's throat 22. Also, the back-cushion 77 enables the main-cuff 55 to be inflated at a lower pressure, *i.e.*, typically 60 cm H₂O, as compared to the inflation pressure required of the main-cuff if the LMA-device 20 does not include a back-cushion 77. Reducing the inflation pressure of the main-cuff 55 enables a reduced wall thickness of the main-cuff.

CLAIMS:

1. A laryngeal-mask airway device comprising:

5 an inflatable main-cuff which, when inflated, has the shape of a torus generated by an asymmetrical oval having a wider proximal region and a narrower distal region, said main-cuff having an inflation port connected to said proximal region and being a molded product of relatively thin and softly pliant elastomeric material; and

10 a backplate comprising a bowl having a transversely concave laryngeal-side and a convex pharyngeal-side, said backplate being hermetically bonded to a periphery of said main-cuff establishing separation between a laryngeal-chamber region and a pharyngeal region,

15 said backplate further comprising an external tube-joint adjacent to said proximal region of said main-cuff, said tube-joint being formed on said pharyngeal-side and extending from said pharyngeal-side into said pharyngeal region, said tube-joint further including a passageway extending through said backplate for communication between said pharyngeal and laryngeal-chamber regions, said bowl having a longitudinal distal rib for longitudinally supporting the distal region of said main-cuff.

20

2. A laryngeal-mask airway device as set forth in claim 1, wherein said distal rib extends into and through the interior of the distal region of said main-cuff.

25

3. A laryngeal-mask airway device as set forth in claim 2, wherein said distal rib has a distal tip which contacts the distal tip of said main-cuff.

4. A laryngeal-mask airway device as set forth in claim 1, wherein said distal rib is seated on the anterior surface of the distal region of said

main-cuff.

5. A backplate for a laryngeal-mask airway device, said backplate comprising a bowl having a transversely concave laryngeal-side and a convex pharyngeal-side, said laryngeal-side having an airway aperture, said backplate
5 being hermetically bonded to a periphery of a main-cuff establishing separation between a laryngeal-chamber region and a pharyngeal region,

said backplate further comprising an external tube-joint adjacent to said proximal region of said main-cuff, said tube-joint being formed on said pharyngeal-side and extending from said pharyngeal-side into said pharyngeal
10 region, said tube-joint further including a passageway extending through said backplate for communication between said pharyngeal and laryngeal-chamber regions, said passageway opening through said airway aperture into said laryngeal-chamber region,

15 said backplate further comprising a first mask aperture bar having opposing proximal and distal ends adjoining said laryngeal side proximally and distally of said airway aperture, respectively, said distal end of said first mask aperture bar being longitudinally positioned generally near the longitudinal mid-point of said laryngeal-side, or distally of said laryngeal-side
20 to limit the angle between the mask aperture bar and the major plane of the main-cuff.

6. A backplate as set forth in claim 5, wherein said backplate comprises a second mask aperture bar having proximal and distal ends adjoining said laryngeal-side at generally the same longitudinal positions
25 along said laryngeal-side as the corresponding proximal and distal ends of said first mask aperture bar.

7. A backplate as set forth in claim 6, wherein said backplate has a

sagittal plane on opposite sides of which said first and second mask aperture bars are disposed.

5 8. A backplate as set forth in claim 7, wherein said first and second mask aperture bars are symmetrical relative to said sagittal plane.

9. A backplate for a laryngeal-mask airway device, said backplate comprising a bowl having a transversely concave laryngeal-side and a convex pharyngeal-side, said backplate being hermetically bonded to a periphery of a
10 main-cuff establishing separation between a laryngeal-chamber region and a pharyngeal region,

said backplate further comprising an external tube-joint adjacent to said proximal region of said main-cuff, said tube-joint being formed on said pharyngeal-side and extending from said pharyngeal-side into said pharyngeal
15 region, said tube-joint further including a passageway extending through said backplate for communication between said pharyngeal and laryngeal-chamber regions, said tube-joint having an anterior outer surface in which is formed an indentation for directing the backplate.

20 10. A laryngeal-mask airway device comprising:

an inflatable main-cuff which, when inflated, has the shape of a torus generated by an asymmetrical oval having a wider proximal region and a narrower distal region, said main-cuff having an inflation port connected to said proximal region and being a molded product of relatively thin and softly
25 pliant elastomeric material;

a backplate comprising a bowl having a transversely concave laryngeal-side and a convex pharyngeal-side, said backplate being hermetically bonded to a periphery of a main-cuff establishing separation between a laryngeal-chamber region and a pharyngeal region,

- said backplate further comprising an external tube-joint adjacent to said proximal region of said main-cuff, said tube-joint being formed on said pharyngeal-side and extending from said pharyngeal-side into said pharyngeal region, said tube-joint further including a passageway extending through said
- 5 backplate for communication between said pharyngeal and laryngeal-chamber regions, the portion of said bowl bonded to said main-cuff defining a bowl plane, said tube-joint having a longitudinal axis forming an acute angle with a bowl plane; and
- 10 a back-cushion bonded to said pharyngeal-side, said back-cushion having a sufficient resistance to compression to enable a reduced acute angle between the tube-joint and bowl plane.

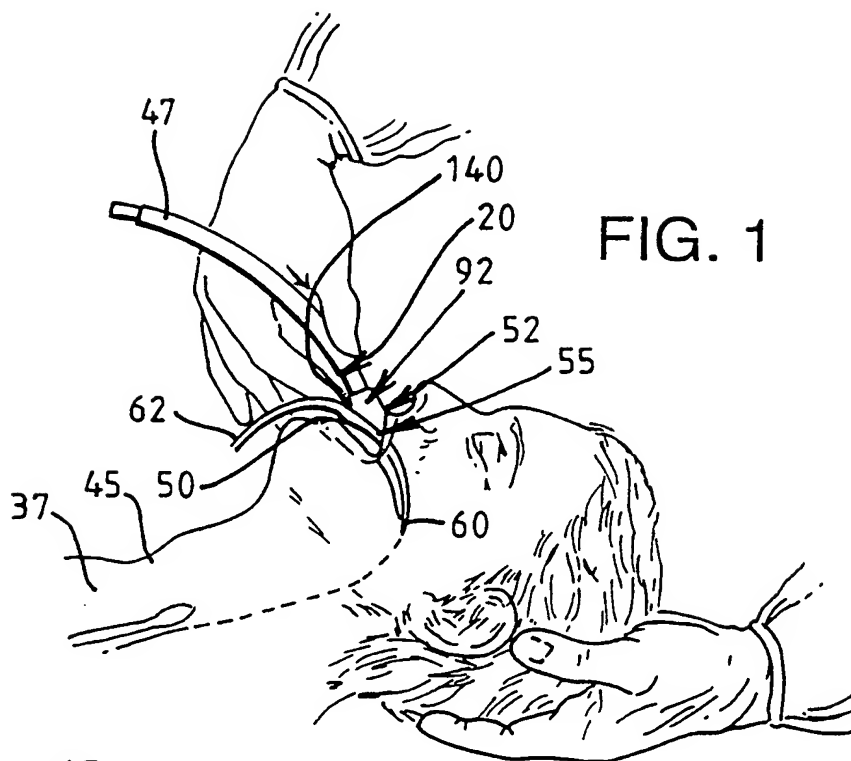


FIG. 1

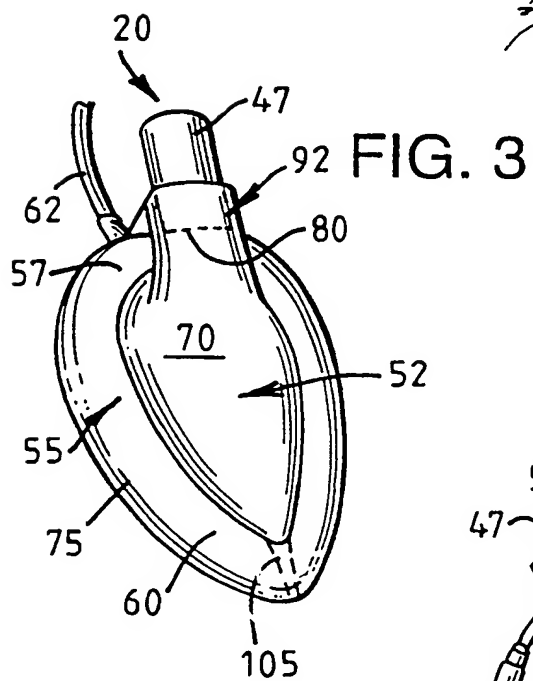


FIG. 3

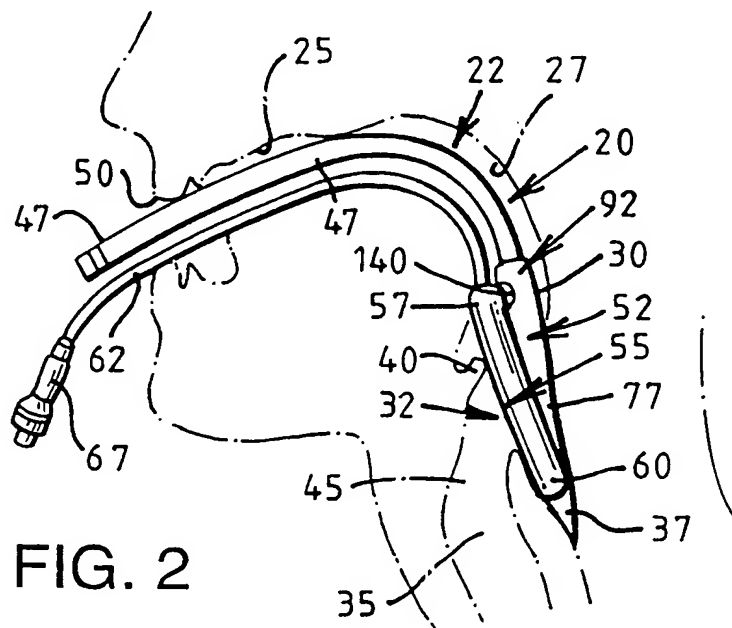


FIG. 2

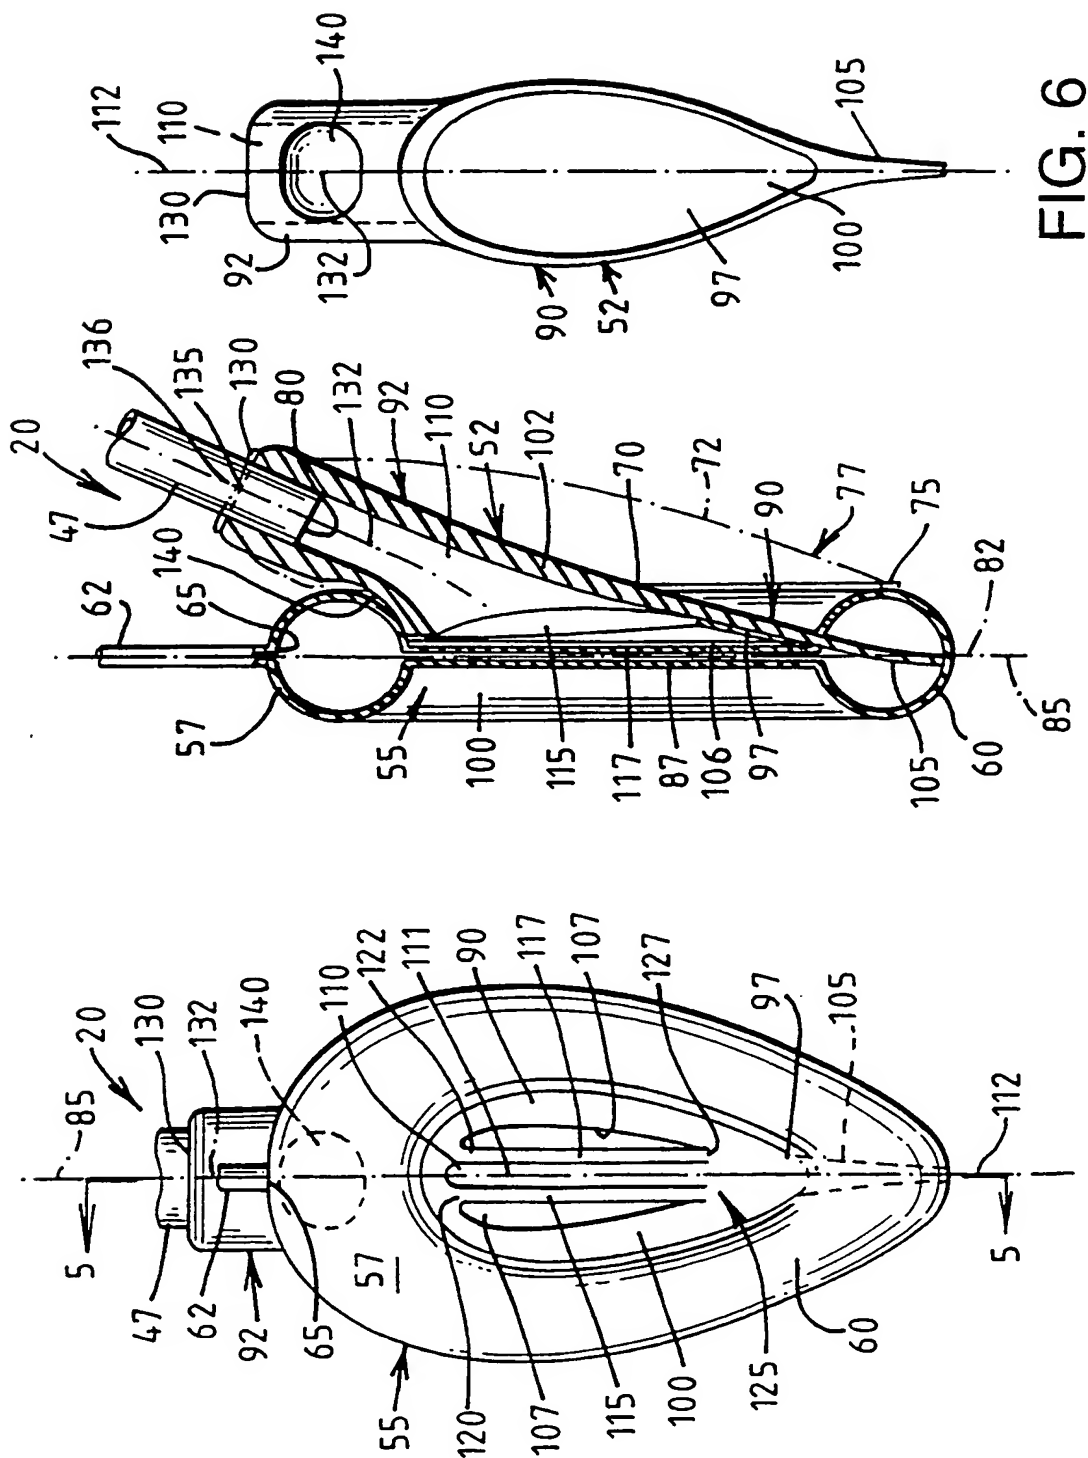


FIG. 6

FIG. 5

FIG. 4

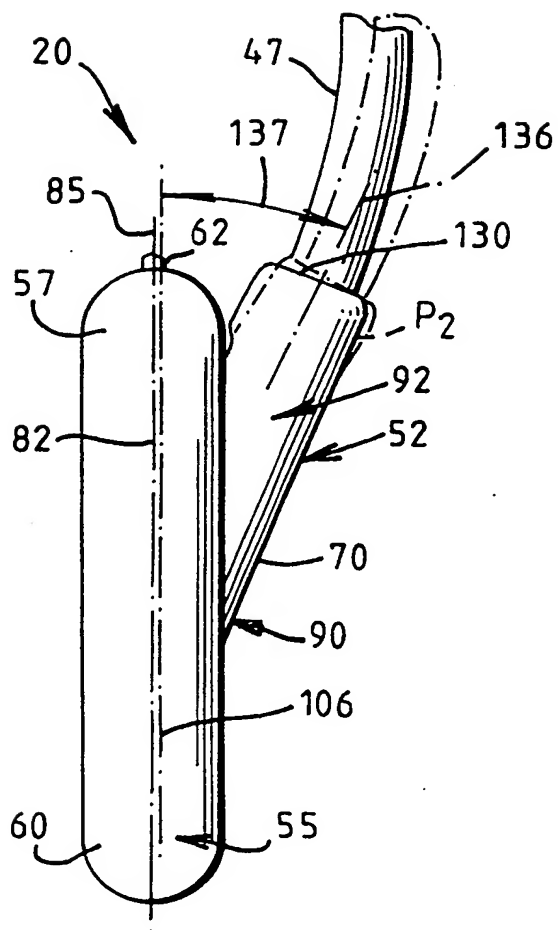


FIG. 7

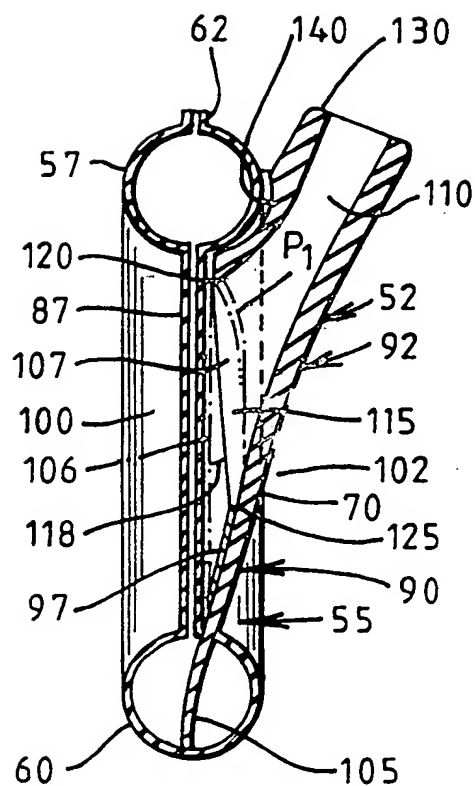


FIG. 8

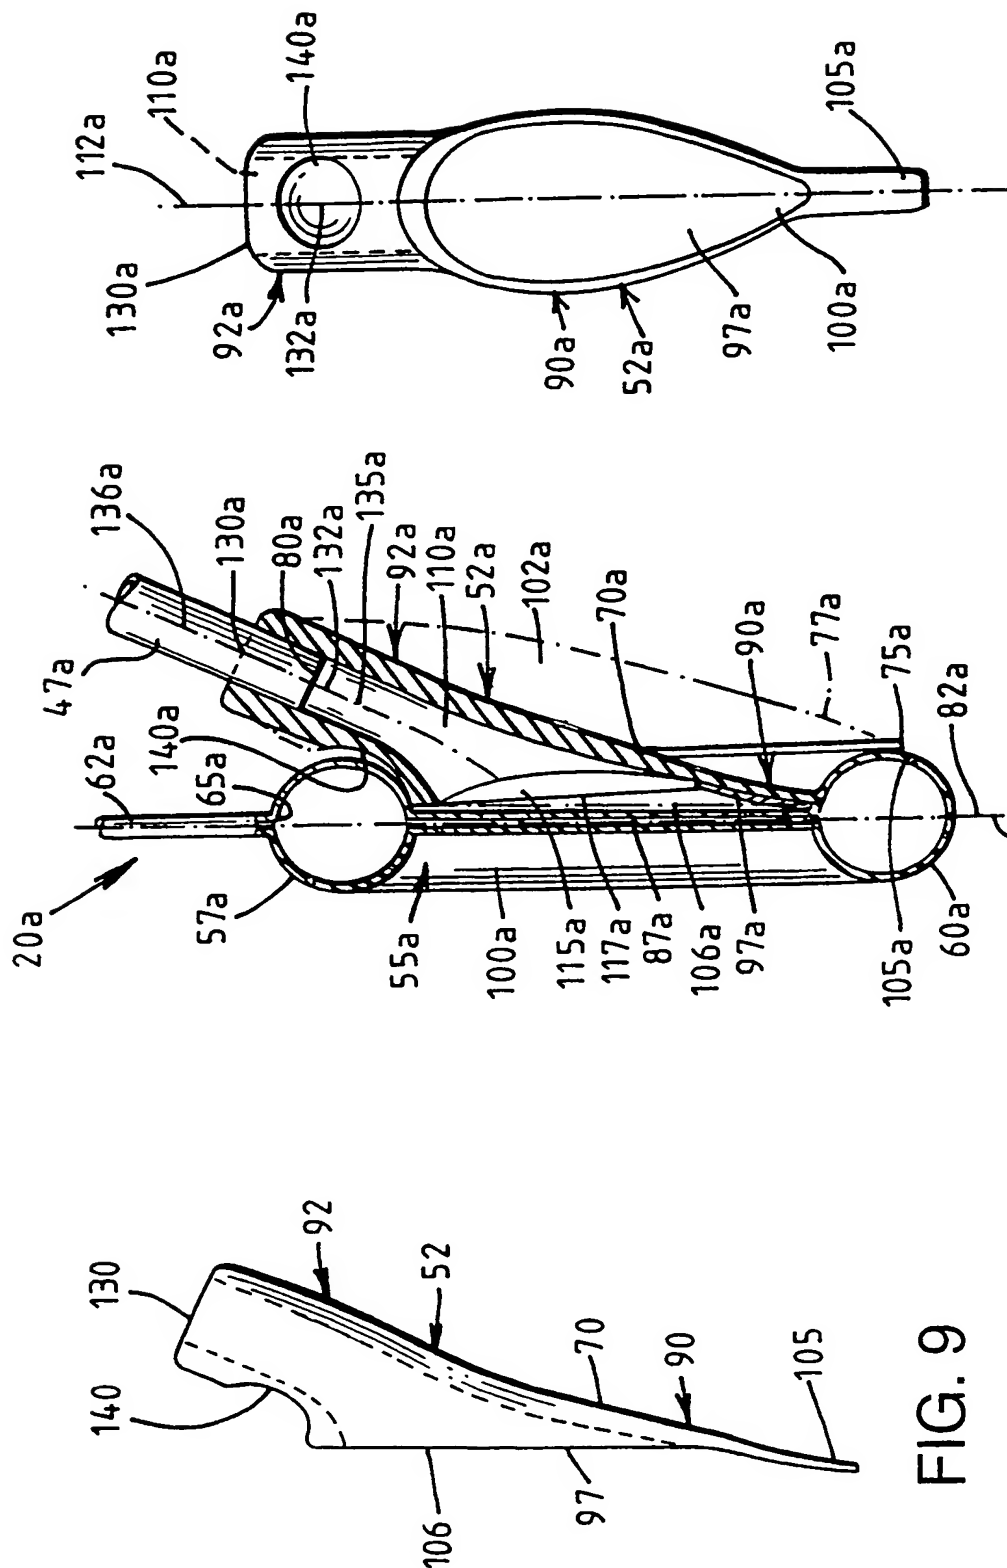


FIG. 11

FIG. 10


FIG. 9

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷: A61M 16/04	A3	(11) International Publication Number: WO 00/20062 (43) International Publication Date: 13 April 2000 (13.04.00)
(21) International Application Number: PCT/GB99/03309 (22) International Filing Date: 6 October 1999 (06.10.99) (30) Priority Data: 9821771.4 6 October 1998 (06.10.98) GB (71)(72) Applicant and Inventor: BRAIN, Archibald, Ian, Jeremy [GB/GB]; Sandford House, Fan Court Gardens, Longcross Road, Longcross, Chertsey, Surrey KT16 0DJ (GB). (74) Agents: WEST, Alan, H. et al.; R G C Jenkins & Co., 26 Caxton Street, London SW1H 10RJ (GB).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> (88) Date of publication of the international search report: 6 July 2000 (06.07.00)

(54) Title: LARYNGEAL MASK AIRWAY DEVICE**(57) Abstract**

A modified laryngeal mask airway device (LMA-device) (20) is provided with means to improve ease of insertion, reliability of function and higher seal pressure (i.e., cuff pressure ratio). The LMA-device (20) includes an indented section (140) of the airway tube (47) to offer locating means and purchase for the inserting finger, and extended mask aperture bars (115, 117) to increase the effective ventilating area of the mask (20) and reduce the possibility of epiglottis displacement occasioned by mask insertion. The LMA-device (20) further includes a modification of the airway tube angle (137) of attachment to the mask (20), and provision of a posterior or back-cushion (77) covering the entire posterior surface of the mask (20).

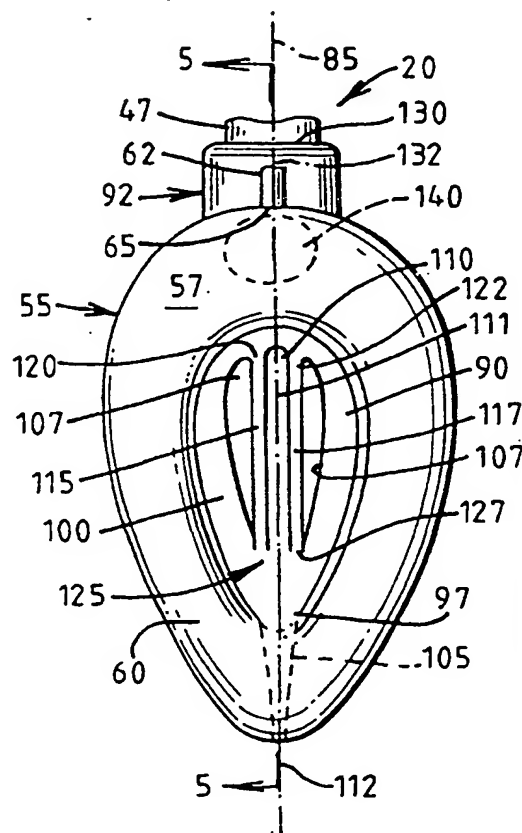

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/03309

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61M16/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 23317 A (IDEAMED N V ; DEN BERG PAULUS CORNELIS MARIA (NL)) 4 June 1998 (1998-06-04) page 8, line 6 - line 38; figures 1,2	1
A	WO 98 16273 A (AUGUSTINE MEDICAL INC ; AUGUSTINE SCOTT D (US); ARNOLD RANDALL C (U) 23 April 1998 (1998-04-23) page 8, line 2 - line 21; figure 1	1
A	GB 2 317 830 A (SMITHS INDUSTRIES PLC) 8 April 1998 (1998-04-08) page 3, line 10 - page 4, line 5; figure 1 page 5, line 19 - page 6, line 5	1
A	GB 2 317 342 A (SMITHS INDUSTRIES PLC) 25 March 1998 (1998-03-25) page 3, line 13 - page 4, line 4; figure 2	1
	-/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 March 2000

Date of mailing of the international search report

07.04.2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 851 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Zeinstra, H

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 99/03309

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 683 908 A (MICHAEL TANTRIMUDALIGE ANTHONY ET AL) 15 August 1972 (1972-08-15) column 2, line 51 -column 4, line 34; figures 1,3	1
A	EP 0 533 371 A (DINGLEY JOHN) 24 March 1993 (1993-03-24) column 2, line 56 -column 3, line 30; figures	9
A	US 4 848 331 A (NORTHWAY-MEYER ROBERT) 18 July 1989 (1989-07-18) column 24, line 27 - line 51	9

INTERNATIONAL SEARCH REPORT

International application No.
T/GB 99/03309

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☒ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
1-4,9

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-4

Laryngeal mask airway device with reinforcement rib

2. Claims: 5-8

Backplate for laryngeal mask airway device, with mask aperture bar

3. Claim : 9

Backplate for laryngeal mask airway device, with indentation

4. Claim : 10

Laryngeal mask airway device with back-cushion

INTERNATIONAL SEARCH REPORT

Indication on patent family members

International Application No

PGP GB 99/03309

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9823317	A	04-06-1998	NL 1004640 C AU 5414998 A EP 0971765 A	05-06-1998 22-06-1998 19-01-2000
WO 9816273	A	23-04-1998	US 5937859 A AU 4491797 A CN 1236326 A EP 0952859 A	17-08-1999 11-05-1998 24-11-1999 03-11-1999
GB 2317830	A	08-04-1998	AU 715965 B AU 3751697 A EP 0834331 A JP 10118182 A US 5871012 A	10-02-2000 09-04-1998 08-04-1998 12-05-1998 16-02-1999
GB 2317342	A	25-03-1998	AU 3682497 A DE 19739123 A FR 2753381 A IT MI972092 A JP 10099437 A	26-03-1998 19-03-1998 20-03-1998 16-03-1999 21-04-1998
US 3683908	A	15-08-1972	US 3841319 A	15-10-1974
EP 0533371	A	24-03-1993	AU 654379 B AU 2203292 A CA 2077951 A DE 69219541 D DE 69219541 T ES 2101038 T GB 2259454 A,B JP 5212120 A US 5277178 A	03-11-1994 18-03-1993 15-03-1993 12-06-1997 04-09-1997 01-07-1997 17-03-1993 24-08-1993 11-01-1994
US 4848331	A	18-07-1989	NONE	

This Page Blank (uspto)